

MODEL DD-1 CONDENSATE DRAIN

Wiliag™ Condensate Drain

FEATURES & BENEFITS

- ◆ **Ready to Install**
- ◆ **No Fabrication Required**
- ◆ **Eliminates Searching for Materials**
- ◆ **175 psi Rated**
- ◆ **24 Hour Ice Build-up Test with No Damage**
- ◆ **600 psi Pressure Tested**

GENERAL DESCRIPTION

The DD-1 Condensate Drain is a Pre-manufactured drum drip for installation in Dry Pipe, Deluge and Preaction Automatic Sprinkler Systems. The DD-1 Condensate Drain body is made from Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing.

Other drains are usually constructed from various parts that must be assembled at the time of installation. There is no comparison in the quality and look of the DD-1 Condensate Drain, and it is quick and easy to install.



TECHNICAL DATA

Volume: 0.1875 gallons

Standard working pressure: 175 psi

Length: 24" (615 mm)

Turning radius: 2.5" (64 mm)

Shipping weight: 6.25 lbs.

Patent: U.S.A. No. 6,102,066

Valve type and manufacturer may vary.

Contact a TFBP distributor for a complete description of all Listing criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.

MODEL DD-1

ORDERING PROCEDURE & SPECIFICATIONS

MODEL-DD1 CONDENSATE DRAIN

Part Number: 52-380-1-001


THE CONDENSATE DRAIN INCLUDES:

- ◆ One condensate barrel
- ◆ Two – 1" shut off valves
(valve manufacturer may vary)
- ◆ One – 1" plug



Example of a field generated drum drip with multiple fittings and pipe nipples.

NOTE: the example shows seven make-ups.

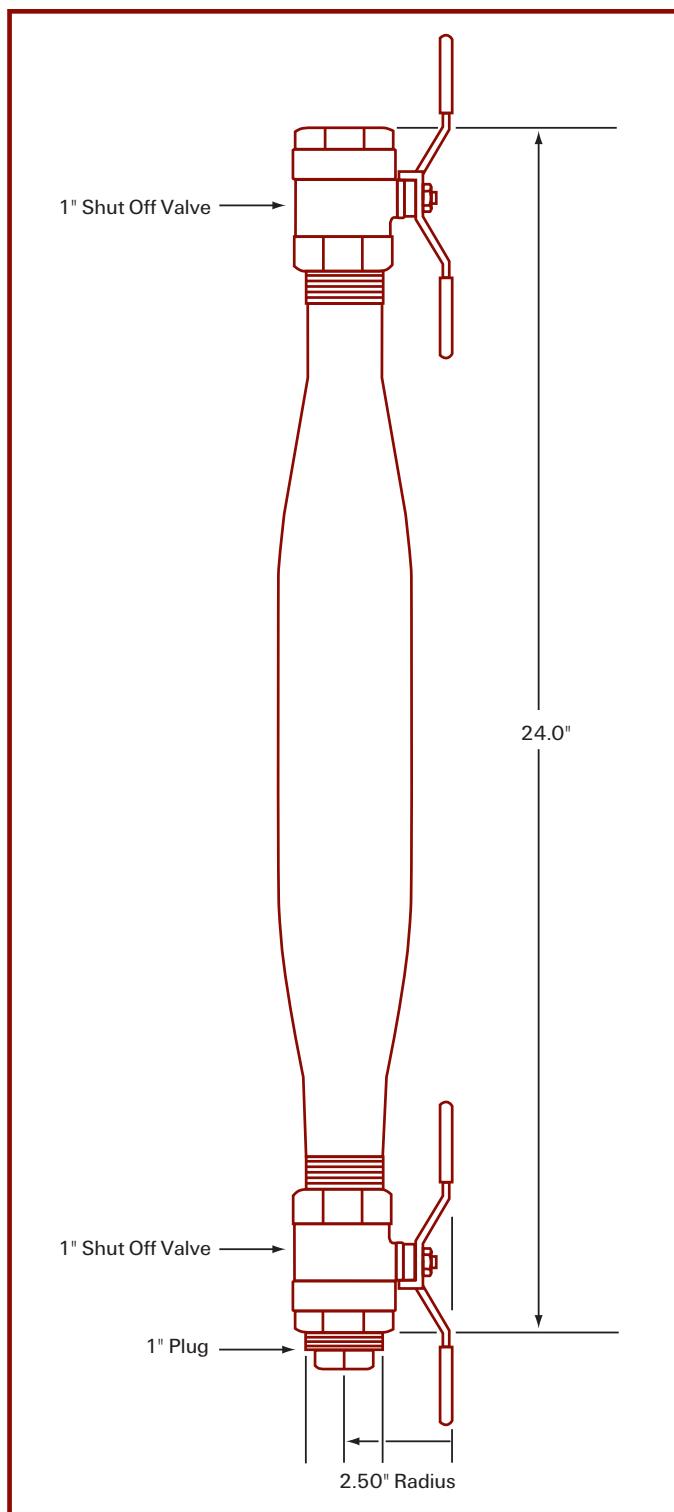

Tyco Fire & Building Products

Technical Services

Phone: 800-381-9312

Fax: 800-791-5500

www.Tyco-Fire.com

tyco / Fire & Building
Products

Contact a TFBP distributor for a complete description of all Listing criteria, design parameters, installation instructions, care and maintenance guidelines, and our limited warranty.